

Filled System Thermometers

Gas Actuated


Table 5 - Accessories & Options

Code	Description
XAW	Acrylic Window (4 1/2" Cases only; not available in "F" Case).
XSG	Safety Glass Window (4 1/2" Cases only; not available in "F" Case).
XFR	Flush Mounting Ring for "E" Case.
XBF	1/2" NPT Fitting for #11 Bulb - Fits on Bulb or extension.
XCF	1/2" NPT Fitting - Fastens on spiral interlock armor (requires XSI option).
XSI	Spiral Interlock Armor (required over 40 feet).
XVD	Vibration Dampening feature (dampens vibration - available in all rear connected models).
XTW	Thermowell (see thermowell table below for order codes).

Thermowells for 3/8" dia. Elements


Standard Wells

External Thread P	Stem length A"	Insert Length U"	Order Code	
			304 s.s.	316 s.s.
3/4" NPT	4	2 1/2	046	146
	6	4 1/2	047	147
	9	7 1/2	048	148
	12	10 1/2	049	149
	15	13 1/2	050	150
	18	16 1/2	051	151
1" NPT	24	22 1/2	052	152
	4	2 1/2	053	153
	6	4 1/2	054	154
	9	7 1/2	055	155
	12	10 1/2	056	156
	15	13 1/2	057	157
18	16 1/2	058	158	
24	22 1/2	059	159	

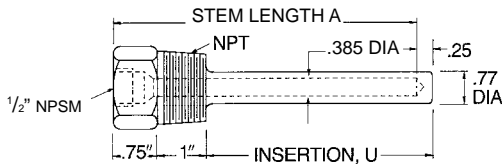

Lagging Wells

External Thread P	Stem length A"	Insert Length U"	Lag Ext. T"	Order Code	
				304 s.s.	316 s.s.
3/4" NPT	6	2 1/2	2	247	347
	9	4 1/2	3	248	348
	12	7 1/2	3	249	349
	15	10 1/2	3	250	350
	18	13 1/2	3	251	351
	24	16 1/2	3	252	352

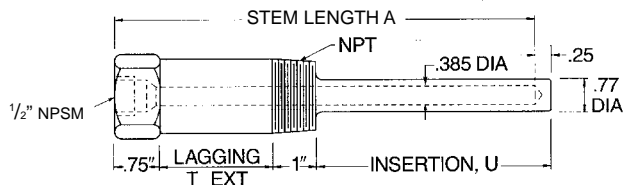

How to Order

Specify "TW" Plus Order Code

Example: **TW-146**