
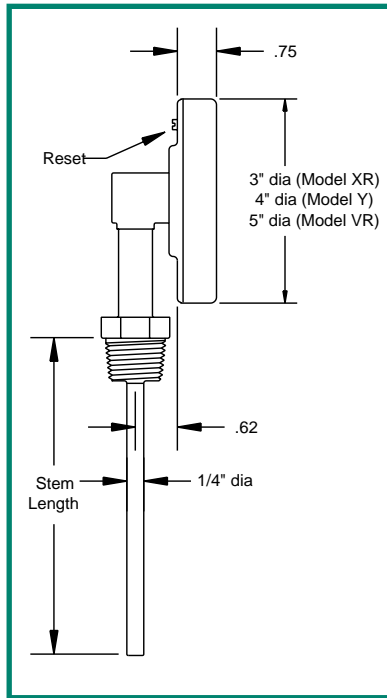


# Bimetal Thermometers Industrial 3", 4", 5" Dial

Bottom Connected  
(Straight Form)



REOTEMP Straight Form thermometers are ideal for side and elevated installations on tops or sides of tanks or pipes.

### Standard Features

- Bottom, Top, Right or Left Side Mounting
- All Stainless Steel Construction
- Hermetically Sealed (ASME B40.3)
- Accurate to 1% of Full Scale
- Standard External Reset
- Silicone Fillable for Vibration

### How to Order

XR

060

1

F43

SF

Models	Stem Length	Connection	Temperature Ranges See pg.13 for full list.	Options
<b>Standard Models</b>		<b>Standard Threaded</b>	<b>Fahrenheit Ranges</b>	
XR = Model XR (3" dial, reset)	025 = 2.5"	1 = 1/2" NPT (std.)	F23 -40 TO 160°F	PS = Pointed Stem
YY = Model Y (4" dial, reset)	040 = 4"	4 = 1/4" NPT	F55* 25 TO 125°F	SF = Silicone Fill (max temp 550°F)
VR = Model VR (5" dial, reset)	060 = 6"	5 = 3/4" NPT adapter	F43 0 TO 200°F	SS = 316 SS Stem
	090 = 9"		F47 0 TO 250°F	S3 = 3/8" dia. Stem
	120 = 12"		F63 50 TO 300°F	PC = Acrylic Window
			F67 50 TO 500°F	PY = Polycarbonate Window
			F69 50 TO 550°F	TG = Tempered Glass Window
			F81 150 TO 750°F	MM = Max/Min Pointer
			F85 200 TO 1000°F	99 = 9 O'Clock Stem (left side)
<b>Non-Reset Models</b>	150 = 15"		<b>Celsius Ranges</b>	33 = 3 O'Clock Stem (right side)
XX = Model X (3" dial, no reset)	180 = 18"		C23 -40 TO 70°C	12 = 12 O'Clock Stem (top mount)
YN = Model YN (4" dial, no reset)	240 = 24"		C55* 0 TO 50°C	For Thermowells see pg. 14
VV = Model V (5" dial, no reset)	300 = 30"		C43 0 TO 100°C	
	360 = 36"		C47 -20 TO 120°C	
			C59 10 TO 150°C	
			C67 10 TO 260°C	
			C69 10 TO 290°C	
			C81 50 TO 400°C	
			C85 100 TO 500°C	
			<b>Dual F/C Ranges</b>	
			D23 -40 TO 160°F & -40 TO 70°C	
			D55* 25 TO 125°F & -5 TO 50°C	
			D43 0 TO 200°F & -10 TO 90°C	
			D47 0 TO 250°F & -20 TO 120°C	
			D63 50 TO 300°F & 10 TO 150°C	
			D67 50 TO 500°F & 10 TO 260°C	
			D69 50 TO 550°F & 10 TO 290°C	
			D81 150 TO 750°F & 70 TO 400°C	
			D85 200 TO 1000°F & 100 TO 500°C	
			* - Not available in 2.5" stem.	
		<b>Sanitary</b>		
		For more information on Sanitary Thermometers see page 12		
	-Intermediate lengths available up to 80"			
	-Specify length in inches + tenths			

## REOTEMP INSTRUMENT CORPORATION

Telephone: (800) 648-7737 FAX (858) 784-0720 • [sales@reotemp.com](mailto:sales@reotemp.com) • [www.reotemp.com](http://www.reotemp.com)