

# Lead Wire Configuration Thermocouples & RTD's

## Plain Leadwires (These are supplied without a transition)

For Plain Wire Leads, specify L \_\_ (length in inches) example: "L6"

This applies to:

- 1) RTD's, std. temp. only, any length leads.
- 2) Thermocouples, leads up to 6".

*Specify all other leadwires below*

## Plain Lead P/N examples:

RTD Example: APX125116X-L36 (36" lead)  
TC Example: M25K1ASG6-L6 (6" lead)

## Other Leadwires (These require a transition)

Table (A)

### Transitions


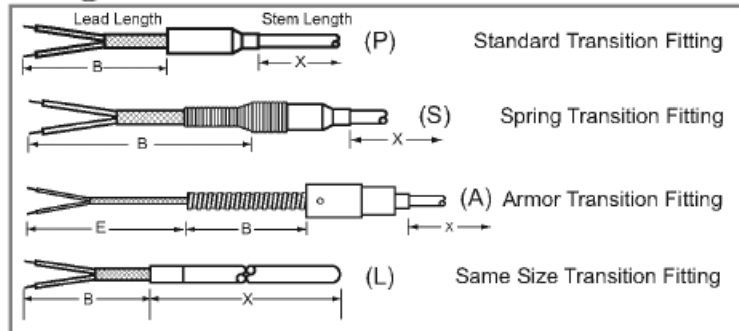


Table (B)

### Terminations



Example: APX125116X - L6LJ2P36F1F

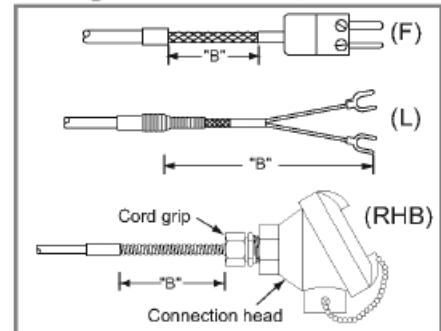